
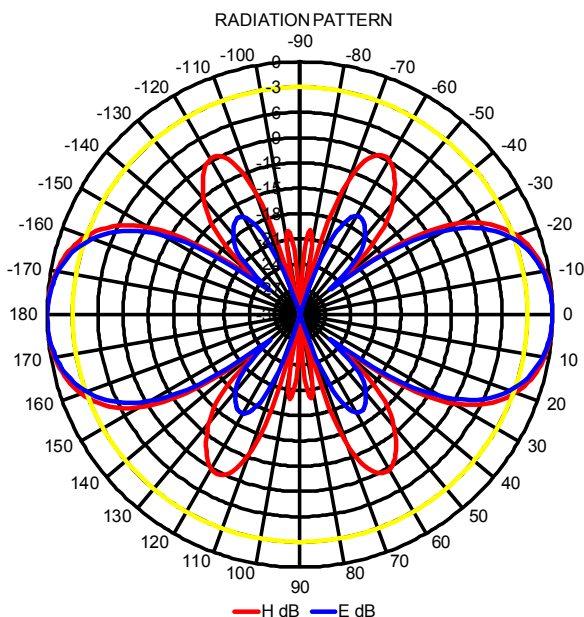


ComAnt[®] Communications Antennas

FREQUENCY INDEPENDENT DATA

Description: directional end fire yagi array, field adjustable pattern
 Frequency: 326-353 MHz, 336-364 MHz, 365-395 MHz, 380-410 MHz, 405-440 MHz, 440-475 MHz
 Impedance: 50 ohm
 Gain: 10 dBi
 H -3 dB: 42°
 E -3 dB: 38°
 F/B: 0 dB
 Polarization: vertical/horizontal
 Connector: N-female/TNC-female
 VSWR: < 1.5
 Radome: UV resistant ABS/FG, RAL 7012, PU foam filling
 Radiator: coated aluminium
 Passive elements: Ø 35-60 mm, aluminium alloy
 Attachment: bracket, stainless steel V-bolts and self locking nuts
 Lightning protection: DC-short circuited
 Temperature: -40°C - +80°C
 IP: 67

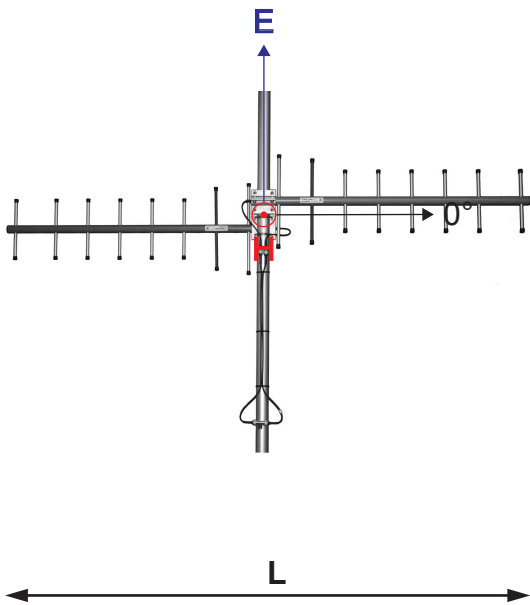

CAF2+++ DIRECTIONAL END FIRE YAGI ARRAY