


WAO-GUL0K-2Cxx0-SMAMW

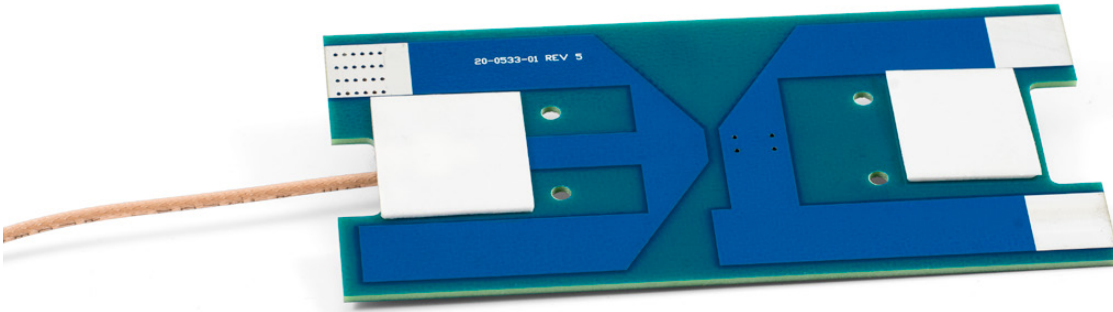

Panel antenna, 698 - 960 / 1710 - 2700 MHz, 3 dBi Gain, Indoor

WAO-GUL0K-2Cxx0-SMAMW

GENERAL DATA	
Type	Control cabinet antenna
Operating Area	Indoor only
Construction Type	Control cabinet antenna
Radiation Type	Omnidirectional
ELECTRICAL CHARACTERISTICS	
Frequency Range LTE	689-960 / 1710-2700 MHz
Gain	2 dBi
VSWR	< 2,2
PHYSICAL CHARACTERISTICS	
Dimensions (WxHxD)	128 x 61 mm
Mounting	Adhesive pad
Material	PCB
CONNECTOR CHARACTERISTICS	
Antenna Connector	SMA (m), 90° angled
Connector Amount	1

MODEL	CABLE LENGTH	ANTENNA CONNECTOR	VERSION
WAO-GUL0K-2C030-SMAMW	30 cm	SMA (m), 90° gewinkelt	Klebepad
WAO-GUL0K-2C100-SMAMW	100 cm	SMA (m), 90° gewinkelt	Klebepad